



1700 MHz Highpass Filter

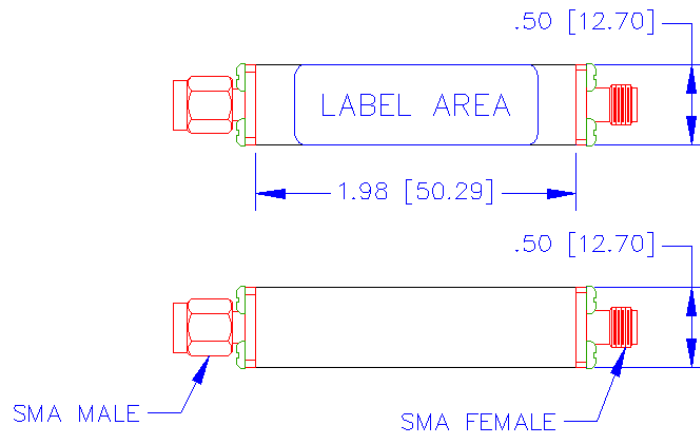

PARAMETER	SPECIFICATION
PASSBAND	1700 – 3000 MHz
INSERTION LOSS	1.0 dB max.
RETURN LOSS	15.0 dB min.
REJECTION 600-900 MHz	60 dB min.
OPERATING TEMPERATURE	-10° to +60°C
STORAGE TEMPERATURE	-30° to +70°C
CONNECTORS	SMA Female/Male
DIMENSIONS (L x W x H)	1.98" x 0.5" x 0.5"
DESIGN OPTIONS	<ul style="list-style-type: none"> ➤ All TechPlus Microwave products can be designed to mount in any configuration you require. ➤ All products can be designed for outdoor use (Weather sealed).

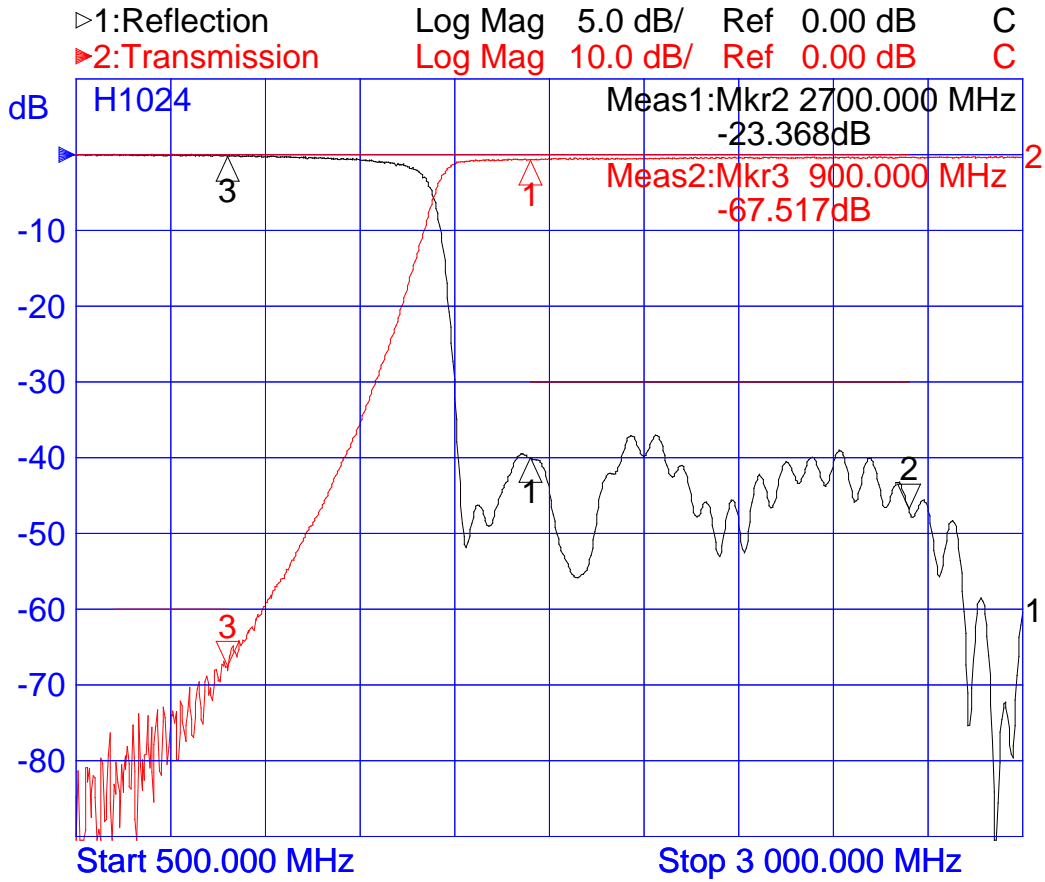

1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1: 1700.0000	-20.002	1: 1700.0000	-0.647
2> 2700.0000	-23.368		
3: 900.0000	-0.122	3> 900.0000	-67.517